OME001.2A2U1C

Standard Color

BK WH

Features

Edge mount 2A2U1C power socket with a built-in wireless charger.





Certifications

Prop65

Warranty

· 3 years,parts only

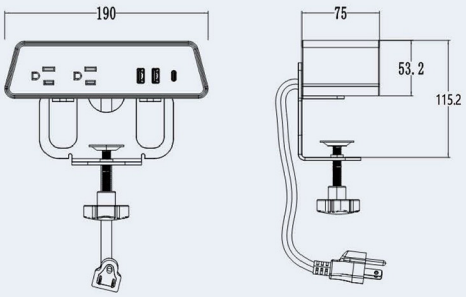

Specifications

Ports	AC Outlets 2xNEMA 5-15R USB Ports 2xUSB-A,1xUSB-C
Cord	Length 5'8" (172.7cm)
Electrical Rating	Power Outlets 120V AC; 60Hz (15A max) USB Ports Support: PD3.0+PPS, QC 3.0 1) USB-A: 5V-3A; 9V-2A; 12V-1.5A QC 3.0 2) USB-C: 5V-A; 9V-2A; 12V-2A; 15V-3A; 20V-3.25A PD3.0 PPS 3.3-15V-3A USB-A + USB-C: 5V/3A (45W)
Environmental	Temperature Operating 0℃ to 30℃ Temperature Operating Storage -10℃ to 50℃
Quick Charging Support Protocol	Type A QC 2.0、3.0 Apple2.4A、Samsung5V 2A. QC3.0 3.6V～12V、DCP1.5A. QC2.0 9V12V、Samsung AFC 9V12VS Type C PD 3.0 Apple2.4A、Samsung5V 2A、QC3.0 3.6VT2V、DCP1.5A、QC2.0 9V12V、Samsung AFC 9V12V. PD3.0 PPS 65W Qi Wireless Charge With wireless charging functions of 5W, 7.5W, 10W and 15W, it can automatically identify the highest power output according to the wireless charging protocol of the charged device.
Package	1Pc/Box; 20Pcs/Ctn; 4800Pcs/20'GP